ASEC

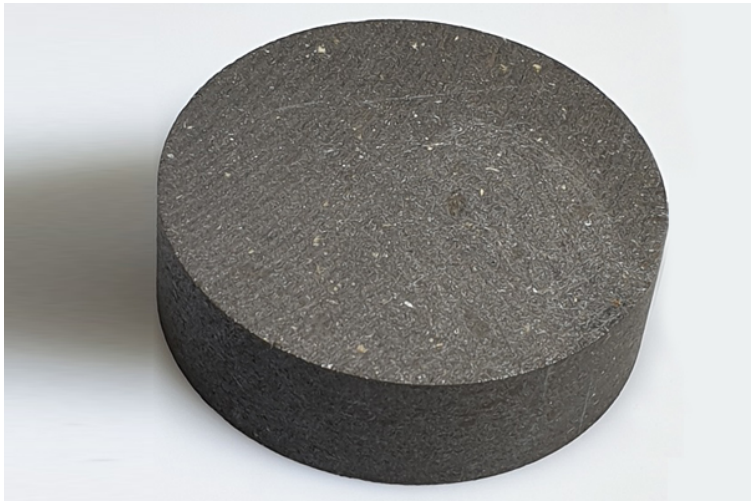

FRICTION MATERIAL AB-3240

SKU: AB3240

ASEC Kunststoffen BV

Marketing 17, 6921 RE Duiven, The Netherlands

T: +31 316 84 44 01 | info@asec.nl

Categories: Organic moulded

It's a black rigid friction material based on graphite with a medium low friction coefficient. Phenolic resins is used as a bonding system with short fibers, friction lubricants and fillers. AB3420 is cured and suitable for bonding and reviting.

Oil resistant. Good characteristics of hardness. Good mechanical strength.

The information in this datasheet is provided for general purposes only and not meant to be a specific recommendation for any individual application. All values were determined under laboratory conditions. ASEC Products is not directly neither indirectly responsible for any claim resulting from the use of any information provided in this datasheet.
ASEC Products 2022 ©.

ASEC

The information in this datasheet is provided for general purposes only and not meant to be a specific recommendation for any individual application. All values were determined under laboratory conditions. ASEC Products is not directly neither indirectly responsible for any claim resulting from the use of any information provided in this datasheet.
ASEC Products 2022 ©.