ASEC

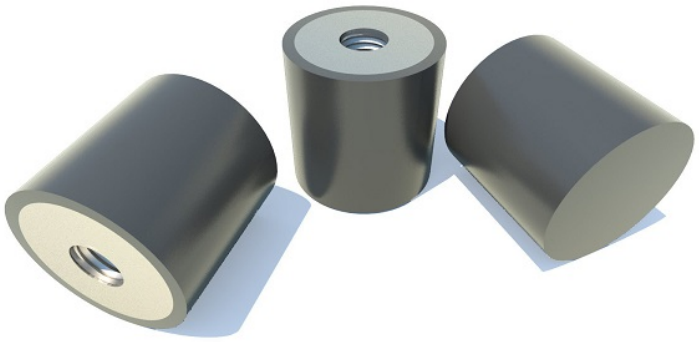

VIBRATION MOUNTS AVDE

SKU: AVDE

ASEC Kunststoffen BV

Marketing 17, 6921 RE Duiven, The Netherlands

T: +31 316 84 44 01 | info@asec.nl

Categories: Resilient stops and buffers

An extensive range of standard products designed to prevent shocks and overloading, thanks to their progressive absorption. They are used in a wide range of applications, whether it be to soften or cushion the contact between two adjacent parts and for use as feet to prevent vibration passing through. The Male buffer range is available in various sizes between 8 – 100mm and can accept loads up to more than 3200 Kg.

Optional ordering with Neopren CR and anti-oil NBR version. Optional orderring with screws with a higher resistance class. Optional orderring stainless steel version. Optional orderring with screws with a specific length in accordance to customer's drawing.

The information in this datasheet is provided for general purposes only and not meant to be a specific recommendation for any individual application. All values were determined under laboratory conditions. ASEC Products is not directly neither indirectly responsible for any claim resulting from the use of any information provided in this datasheet.
ASEC Products 2022 ©.

ASEC

The information in this datasheet is provided for general purposes only and not meant to be a specific recommendation for any individual application. All values were determined under laboratory conditions. ASEC Products is not directly neither indirectly responsible for any claim resulting from the use of any information provided in this datasheet.
ASEC Products 2022 ©.