ASEC

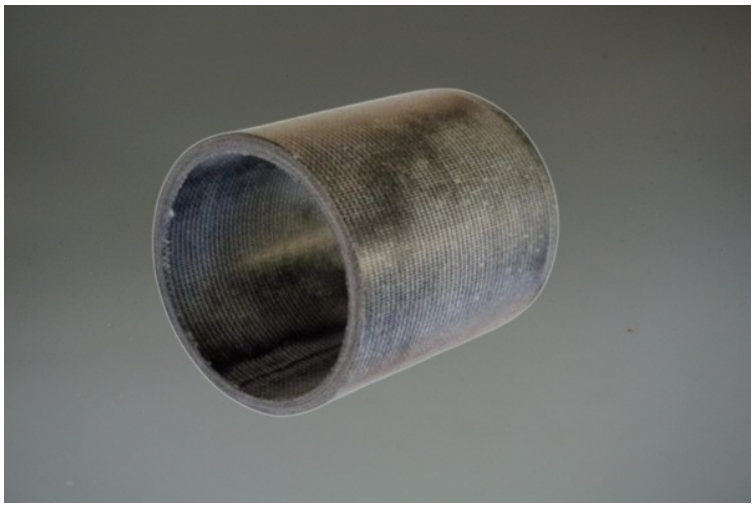

SLIDING BEARINGS ASA10TTO(F)

SKU: ASA10TTO(F)

ASEC Kunststoffen BV

Marketing 17, 6921 RE Duiven, The Netherlands

T: +31 316 84 44 01 | info@asec.nl

Categories: Composite bearings

TriboTough 10 range incorporates reinforced fabric technology to deliver the same enhanced temperature performance as TriboTemp 10, while offering the highest compressive strength of any polyester-based composite. This advancement allows the material to withstand static loads up to 20% higher and dynamic loads up to 10% higher than TriboTex 7 materials.

The information in this datasheet is provided for general purposes only and not meant to be a specific recommendation for any individual application. All values were determined under laboratory conditions. ASEC Products is not directly neither indirectly responsible for any claim resulting from the use of any information provided in this datasheet.
ASEC Products 2022 ©.

ASEC

Availablity		Value	Unit
Min. inside diameter		12	mm
Max. outside diameter		2300	mm
Length standard		450 / 670 / 950	mm
Sheet size		450x450/670x670/950x950	mm
Sheet thickness		2.5-200	mm
Mechanical properties	Test standard	Value	Unit
Comp. strength static		180	MPa
Dynamic load capacity		100	MPa
Thermal properties	Test standard	Value	Unit
Min. working temperature		-40	°C
Max. working temperature		150	°C
Inter. working temperature		200	°C

The information in this datasheet is provided for general purposes only and not meant to be a specific recommendation for any individual application. All values were determined under laboratory conditions. ASEC Products is not directly neither indirectly responsible for any claim resulting from the use of any information provided in this datasheet.
ASEC Products 2022 ©.